



ESPECIALIZADA EM AUTOMAÇÃO INDUSTRIAL

AT

Rotative Cylinder






Dimensions

Model	32	40	52	63	75	83	92	105	125	140	160	190	210	240	270	300	350	400
A	110	122	147	168	186	212	262	268	301	390	458	534	538	602	A	782	920	940
B	46	65	71.5	83	95	103	108.5	121.5	142	152.5	174	206	226	260	294	336	385	520
C	46	60	72	88	99.5	109	116.5	133	155	172	197	230	255	289	326	350	410	466
D	66	80	92	108	119.5	D	136.5	153	185	202	227	260	285	319	356	380	440	496
E	Ø40	Ø40	Ø40	Ø40	Ø40	Ø40	Ø40	Ø40	Ø55	Ø55	Ø55	Ø80	Ø80	Ø80	Ø80	Ø80	Ø80	Ø80
F	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8	M5x8
G	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30	30
H	50	80	80	80	80	80	80	80	80/130	80/130	80/130	130	130	130	130	130	130	130




Overall Dimension

ATDA 32,40

ATDA-32

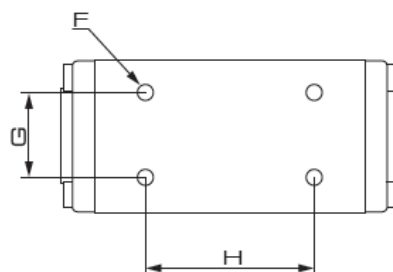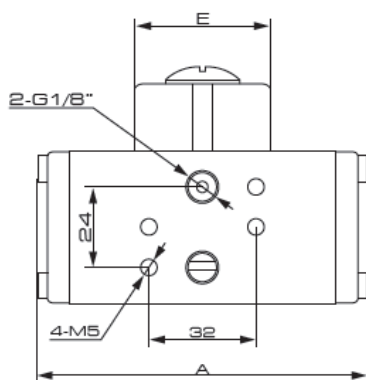


ATDA/SA-40

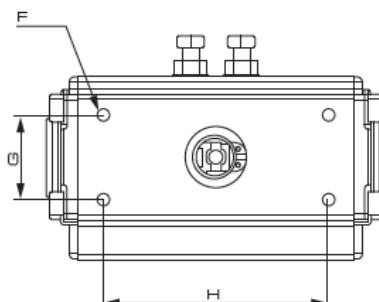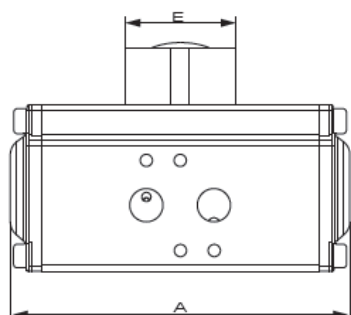



ATDA/SA-52-270

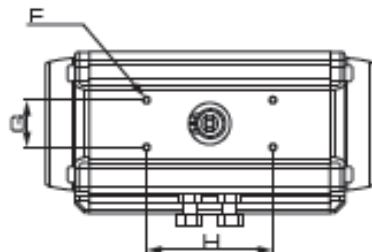

Technical drawing of the front view of a metal safe. Callout F points to the top edge of the door. Callout G points to the handle assembly on the left side. Callout H points to the locking mechanism at the bottom center.

[illegible]